




## 2\_1\_stereo

Fixed configuration made of 2 micro-speakers and 1 dual sub for each channel

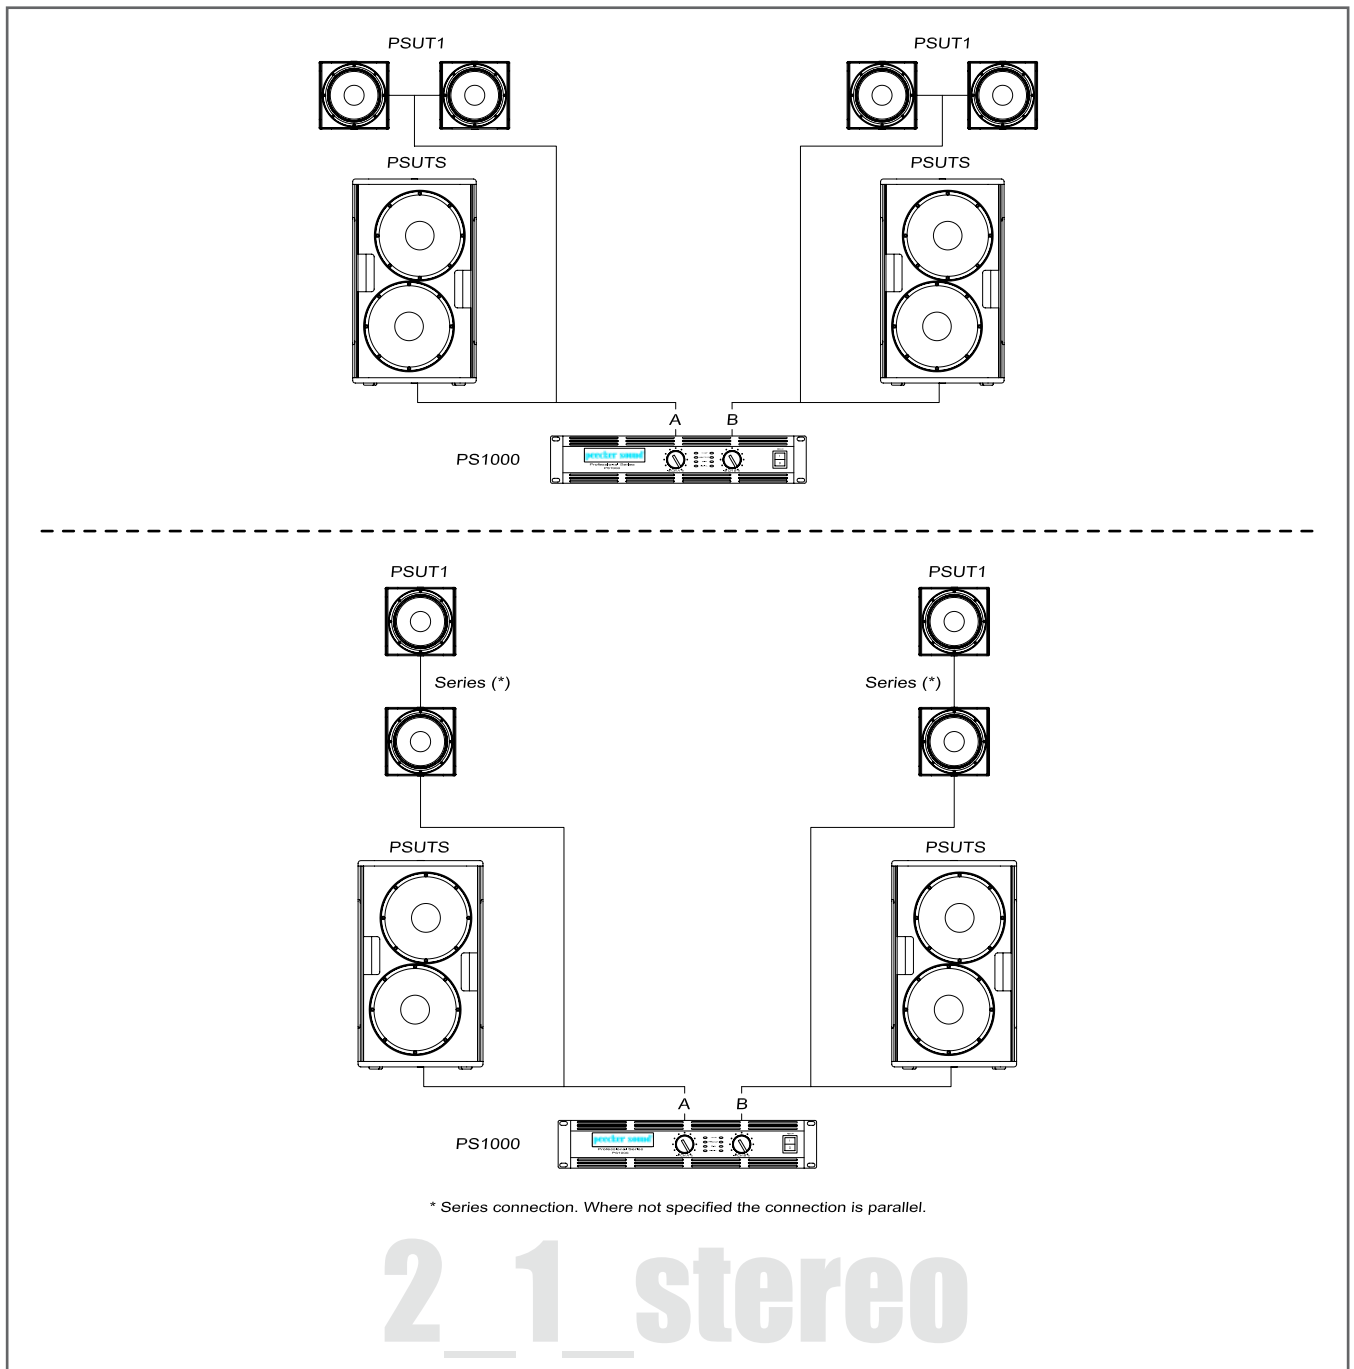

### PRODUCTS

No.	Code	Description
4	<b>PSUT1</b>	Stackable Micro Loudspeaker System (up to 4 elements) - RMS Power: 50 W
2	<b>PSUTS</b>	High efficiency Ultra-compact Suspendable Dual Subwoofer - RMS Power: 160 W
1	<b>PS1000</b>	Stereo Power Amplifier - Power RMS: 2x450 W (@4 Ohm), 2x280 W (@8 Ohm)



# UPTURNED T series

## APPLICATIONS

- Dance clubs, night clubs, ballrooms and other dancing venues (*background music only*);
- Wine/lounge bars and HO.RE.CA. (*Hotels, Restaurants and Cafés*);
- Casinos, game rooms, cruise ships and beach clubs (*background music only*);
- Cinemas and home theater;
- Multi-purpose halls, sports, recreational and/or cultural venues;
- Convention and trade show centres;
- Audio-visual installations for exhibitions, shows, competitions and other events;
- Beauty salons, fitness centres;
- Other fixed installations (shops, shopping malls, airports, etc.)

## BRIEF DESCRIPTION

- Speakers' Total Power Handling: **520 W RMS**;
- Amplifiers' Total Power: **450+450 W RMS (@ 4 Ohm)**;
- Coverage Angle: **100° (conical)**;
- Sound Reinforced Area: **36 m<sup>2</sup>**;
- **Tiny Overall Dimensions**;
- Possibility of **stacking** (and pointing) **the Satellites** or fixing them to the Subs;
- Several Colours available (**any RAL**).

## CONNECTORS

**PSUT1** micro-loudspeaker systems and **PSUTS** dual subwoofers are equipped with standard red/black spring terminals for power audio connection. **PSUTS** has two pairs of spring terminals, usable for input or link to another **PSUTS** or

**PSUT1** as well (*loop through*), in case of full range amplification. **PSUT1** has one input terminal pair, which can be used also for parallel or series links to other speakers of the same type.

MODEL & TYPE \ COLOUR	BLACK	RED
<b>PSUT1</b> (1 pair of spring terminals)	Full range input -	Full range input +
<b>PSUTS</b> (2 pairs of spring terminals)	Full range input - Full range link to PSUT1 -	Full range input + Full range link to PSUT1 +

## ACCESSORIES

Code	Description
<b>STD-WUT1</b>	Wall bracket for vertical support of 1 or 2 (1 PSUT8AE + 1 PSUT8TE) sound columns
<b>STD-PSUT124</b>	Flying bracket for 2 or 4 PSUT1 speakers (side-by-side or stacked)
<b>STD-PSUTS</b>	Flying bracket for 1 PSUTS subwoofer
<b>TRA-PSUT1</b>	30W (16 Ohm)/100V line transformer for the connection of PSUT1 to 100V constant voltage lines
<b>TRA-PSUTS</b>	150W (8 Ohm)/100V line transformer for the connection of PSUTS to 100V constant voltage lines

SOUND REINFORCEMENT

CONTROLLED RADIATION

ACOUSTIC RESEARCH