


2_0_stereo

Fixed configuration made of 2 sound columns for each channel

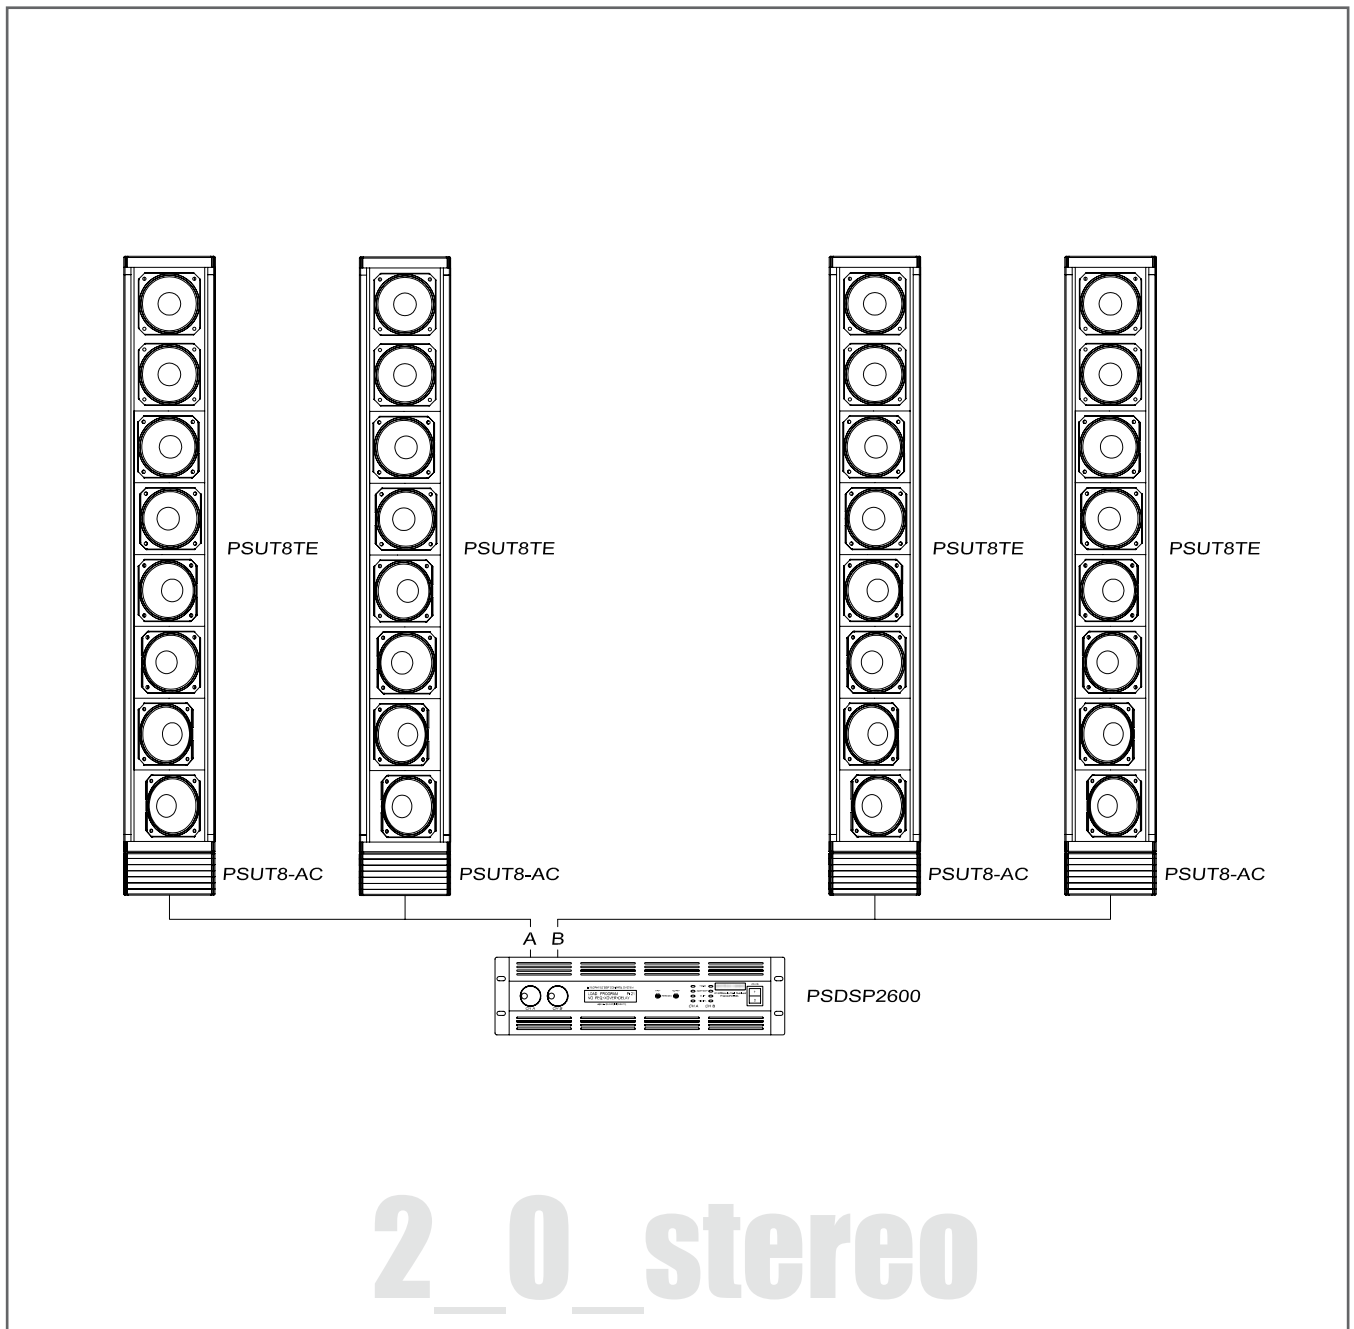

2_0_stereo

PRODUCTS

No.	Code	Description
4	PSUT8TE	Stackable Hybrid-dispersion Sound Column Top Element - RMS Power: 400 W
1	PSDSP2600	Stereo Power Amplifier - Power RMS: 2x1300 W (@4 Ohm), 2x850 W (@8 Ohm)

SOUND REINFORCEMENT

CONTROLLED RADIATION

ACOUSTIC RESEARCH



UPTURNED T series

APPLICATIONS

- Cinemas;
- Places of worship;
- Multi-purpose halls, sport, recreational and/or cultural venues;
- Convention and trade show centres;
- Corporate events;
- Audio-visual installations for exhibitions, shows, competitions and other events.

BRIEF DESCRIPTION

- Speakers' Total Power Handling: **1600 W RMS**;
- Amplifiers' Total Power: **1300+1300 W RMS (@ 40hm)**;
- Horizontal Coverage Angle: **4x140°** (*multi-angular loudspeaker design*);
- Maximum Audience: **250÷300 people**.

CONNECTORS

In addition to *Active Stack* configurations, the **PSUT8TE** and **PSUT8AE** models can be used as passive element. For this purpose an additional accessory PSUT8-AC is available, which, hooked directly beneath the column elements, works as *Jumper-SpeakOn NL4*

converter (as well as allowing a comfortable installation on the PS-ST125 stand holder). This configuration is suitable for high quality speech reinforcement or background music, both with a particular benefit in wide venues.

TYPE \ PINS	1+	1-	2+	2-
NL4	Full range input +	Full range input -	/	/

PROCESSOR PRESETS

DSP UNIT	PRESET NAME ON AMPLIFIER DISPLAY	SOUND FILE	CONFIGURATION
PSDSP2600	PSUT8TE	max4PSUT8TE_PSDSP2600speech/music.DP6	Distributed column elements

ACCESSORIES

Code	Description
STD-WUT8	Wall bracket for vertical support of 1 or 2 (1 PSUT8AE + 1 PSUT8TE) sound columns
PSUT8-AC	Jumper-SpeakOn converter and adapter flange for PSUT8TE to PS-ST125 stand
UT8-COVER	Protection enclosure for 1 PSUT8TE or PSUT8AE or for 1 PSUT8-ST70 stand holder

SOUND REINFORCEMENT

CONTROLLED RADIATION

ACOUSTIC RESEARCH